


PR7100 Proofer Retarder



The unique technology in a Revent Proofer Retarder will take your baking quality to an even higher level.

ReventTM
More than Quality.

Rack configurator

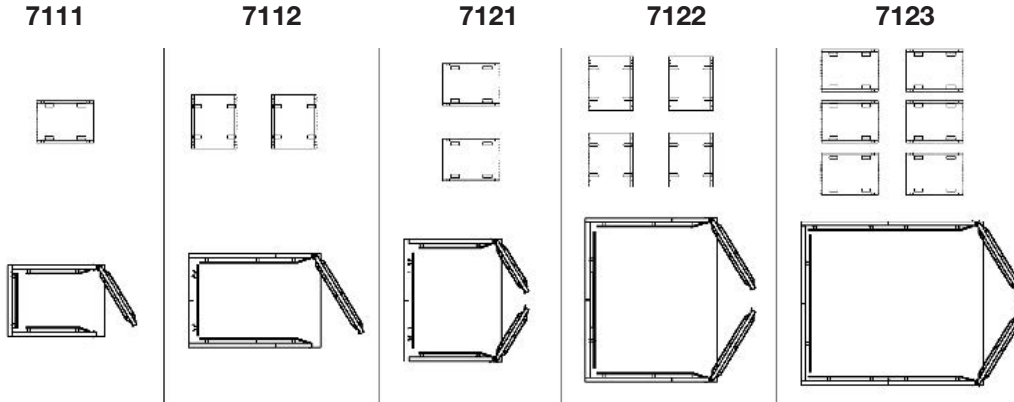

Standard Features

- > Programmable control with up to 7 day cycle or Easy to use Manual mode
- > Refrigeration (R22 Refrigerant) with 8,600 btu capacity
- > Reverts airwash humidifier
- > Medium temperature cooling coil with Cool mist capacity (humidifying above 40F)
- > Model 7111 and 7112 has remote mount refrigeration units as standard

NOTE: Other sizes available, check with factory

Utility Requirements

- > Water Supply: 1/2" supply, 1/8" FNPT, 30-60 PSI
- > Drain: 3/4" connection back
- > Electrical: 5 kW, 208/240 VAC, 3ph



Options

- > Remote refrigeration.
 - Capacity: 8,600 BTU.
 - Connections: 3/8" liquid and 5/8" suction

Model	No. of racks single double	No. of doors	Door opening size (w x h)	Heating capacity	Cooling capacity	Inside dimensions (w x d x h)	Outside dimensions (w x d x h)
7111	1 single	1	28" x 77.5"	3.3 kw	8,600 btu	28" x 36" x 74"	36.5" x 45.5" x 95.5"
7112	2 singles or 1 double	1	32.5" x 77.5"	3.3 kw	8,600 btu	32.5" x 42" x 74"	41" x 52" x 95.5"
7121	2 singles or 1 double	2	46" x 77.5"	3.3 kw	8,600 btu	46" x 36" x 74"	54.5" x 45.5" x 95.5"
7122	4 singles or 2 doubles	2	59" x 77.5"	5 kw	8,600 btu	59" x 42" x 74"	67.5" x 52" x 95.5"
7123	6 singles or 3 doubles	2	59" x 77.5"	5 kw	8,600 btu	59" x 66" x 74"	67.5" x 76" x 95.5"

Continuous product development is a Revent policy. Therefore, we reserve the right to change specifications and/or design without prior notice. Pictures or drawings may include product options.

Revent sales representative:



Revent Incorporated

100 Ethel Road West, Piscataway, New Jersey 08854
 Phone (732) 777-9433, Fax (732) 777-1187
 Toll Free 800-822-9642
 E-mail info@revent.com, www.revent.com